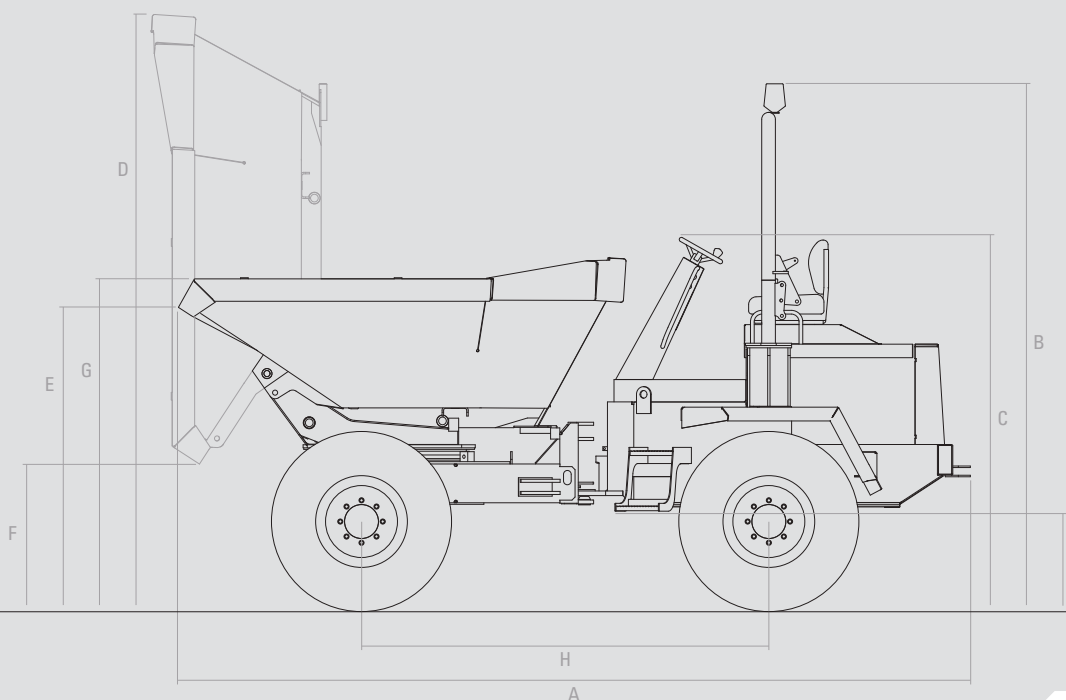



SKR9: NINE TONNE ROTARY TIPPING DUMPER
Capacities:

Payload capacity – tonnes	9
Liquid capacity – ltr	2484
Struck capacity – ltr	3186
Heaped capacity – ltr	4366

Dimensions:

A = overall length – mm	4797
B = overall height - ROPS up – mm	3246
C = overall height - ROPS down – mm	2308
D = overall height - skip tipped – mm	3790
E = prow height – mm	2044
F = tipped prow height – mm	1090
G = side loading height – mm	2167
H = wheel base – mm	2400
I = ground clearance – mm	440
Overall width – mm	2485
Width over tyres – mm	2430
Outer turning circle – metres	13

Weight:

Unladen weight – kg (with ROPS and full tanks)	4920
--	------

Engine type:

Iveco N45 MNTD 94kW @ 2300rpm	4485cc
-------------------------------	--------

Transmission:

Powershuttle transmission, 4 speeds forward and reverse with torque converter. Heavy duty drive train.

Axles and brakes:

Heavy duty double reduction axles with fully floating half shafts. Totally enclosed oil immersed disc brakes.

Wheels and tyres:

500/60 - 22.5 High floatation tyres	16 ply
-------------------------------------	--------

Tank capacities:

68 ltr fuel tank	40 ltr hydraulic tank
------------------	-----------------------

Road speed mph/kph:

1st gear:	3.0	4.8
2nd gear:	4.9	7.8
3rd gear:	9.2	14.7
4th gear:	16.7	26.8